

Technical Data Sheet

CODE 61751

NORDIK EVOLUTION R 120/48" BIANCO

Reversible ceiling fans




Certifications



TECHNICAL AND PERFORMANCE DATA

Fan diameter	1284	Weight (Kg)	7,1
Frequency (Hz)	50/60*	Max airflow (m ³ /h)	13810
Insulation class	I°	Max airflow (m ³ /min)	230,17
Max absorbed current (A)	0,34	Max flow speed (m/s)	2,36
Max absorbed power (W)	70	RPM	198
Voltage (V)	220-240	Service value (m ³ /min)/W	3,288
		Sound power Lw [dB(A)]	49,1

DIMENSIONS

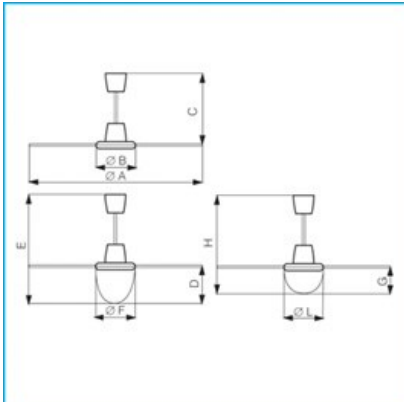

Size A (mm)	980
Size B (mm)	298
Size C (mm)	495
Size D (mm)	229
Size E (mm)	724
Size F (mm)	291
Size G (mm)	145
Size H (mm)	640
Size L (mm)	291

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com

Technical Data Sheet

CODE 61751

NORDIK EVOLUTION R 120/48" BIANCO



Reversible ceiling fans

DESCRIPTION

- Nominal diameter of blades 1200 mm
- Top and bottom motor covers moulded from heat-resistant and UV-resistant thermoplastic resin (ABS), colour white.
- Wiring connections at end of ceiling rod concealed by domes moulded from impact- and UV-resistant thermoplastic resin (PP).
- Single phase start capacitor motor with external rotor, and shaft turning in ball bearings. Direction of rotation reversible.
- Maximum air flow 13810 m³/h
- 3 galvanized sheet steel blades powder coated with scratch-resistant polyester, colour white.
- Steel ceiling rod with scratch-resistant polyester powder coated finish, colour white, length 375 mm.
- Bag of accessories containing nuts and bolts required for assembly of blades, ceiling hook and rubber anti-vibration washer.
- Factory-prepared to accept 2 specific optional light kits:
 - ? with lamp rated 105 W max, E27 screw fitting
 - ? with 2x15 W max energy saving lamp, E27 screw fitting (mandatory in EU).
- Speed selectable by way of control units or Telenordik 5TR remote control (optional)

ACCESSORIES



EVOLUTION LIGHT KIT ES

Code 22414



EVOLUTION LIGHT KIT

Code 22413



SCRR5

Code 12963



SCRR/M

Code 12965



KIT SCBRR5/5L/M

Code 22489



SC 503 B

Code 12801



SC 503 N

Code 12802



SC EXT B

PER INFORMAZIONI / FOR INFORMATION



SCI503



PSC-W



PSC-B

ITALY
Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF
IRELAND
Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES
Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com



SCRR5L

Code 12964



ASTA NK I 200

BIANCA

Code 22032



ASTA NK I 250

BIANCA

Code 22033



ASTA NK I 350

BIANCA

Code 22042



ASTA NK I 500

BIANCA

Code 22051



ASTA NK I 750

BIANCA

Code 22074



ASTA NK I 1000

BIANCA

Code 22077

TELENORDIK

5TR

Code 22386

**SET PALE NK I
PLUS 120/48
BIANCO INT**

Code 22632

VORT DELTA T

Code 13039