


WALL-MOUNTED/FLOOR-STANDING POOL DEHUMIDIFIERS

SET 1501-2501-3501 T

FOR SWIMMING POOLS, SPAS AND LEISURE CENTRES

SWIMMING POOL DEHUMIDIFIERS SET 1501-2501-3501 T

SET's new range of swimming pool dehumidifiers are energy-efficient, quiet, and a stylish addition to any private pool or spa.

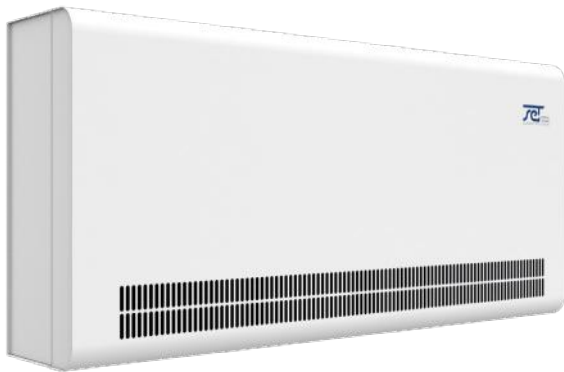

SET 3501 T

The wall-mounted or floor-standing SET 1501-1201-1501 condensation dehumidifiers are stylish and elegant and have been designed to blend well with any modern pool interior.

Offering energy-efficient and near-silent humidity control, the units were conceived with a view to quality and ease of operation. Combined with highly efficient fans and compressors, the advanced remote control and monitoring options contribute to cost-efficient operation and significant energy savings.

Features

- Low sound level
- Low energy consumption
- Evaporator and condenser coils are epoxy coated
- Metal parts are powder coated before assembly
- Optional remote control
- Integrated control of heating and humidity
- BMS Communication (Modbus)

Applications

- Indoor pools
- Private pools
- Spa pools
- Wellness centres
- Therapy pools




Flexible installation – wall-mounted or floor-standing – to adapt to your requirements

SWIMMING POOL DEHUMIDIFIERS SET 1501-2501-3501 T




Performance data

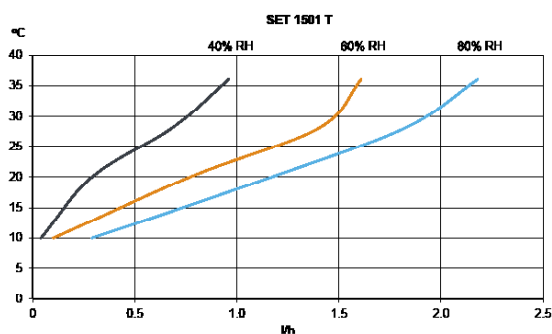


Specific energy consumption (SEC):
0.47 kWh/l at 28°C & 60% RH



Perfect for indoor private pools and spas

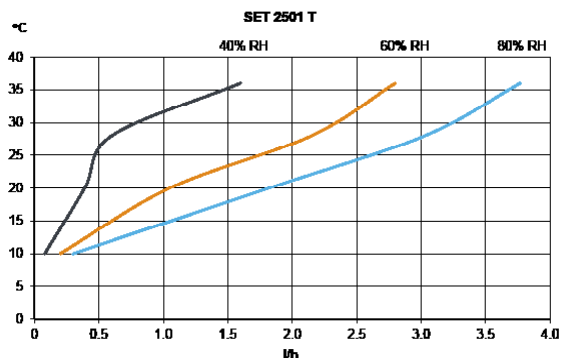

Specific energy consumption (SEC):
0.48 kWh/l at 28°C & 60% RH

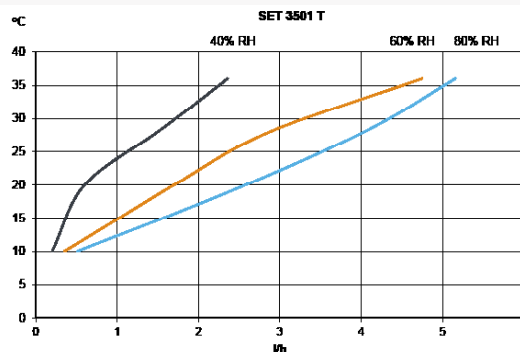

Specific energy consumption (SEC):
0.43 kWh/l at 28°C & 60% RH

| Specifications | Units | SET 1501 T | SET 2501 T | SET 3501 T |
|-----------------------------|-------------------|------------------|------------------|------------------|
| Operating temperature range | °C | 10-36 | 10-36 | 10-36 |
| Operating humidity range | % RH | 40-100 | 40-100 | 40-100 |
| Dehumidification rate | kg/h | 1.9 | 3.25 | 4.2 |
| Air flow | m ³ /h | 400 | 680 | 900 |
| Sound pressure level | dB(A) | 46 | 47 | 50 |
| Power supply | V/Hz | 230/1ph/50 | 230/1ph/50 | 230/1ph/50 |
| Total connected load | kW | 0.9 | 1.5 | 1.8 |
| Fuse | A | 3.8 | 6.6 | 8.0 |
| Product size (w x d x h) | mm | 1004 x 308 x 695 | 1154 x 308 x 695 | 1488 x 308 x 695 |
| Weight | kg | 56.5 | 65.0 | 75.5 |